




CABLE TIES

intercable

POLYAMIDE PA6.6 CABLE TIES

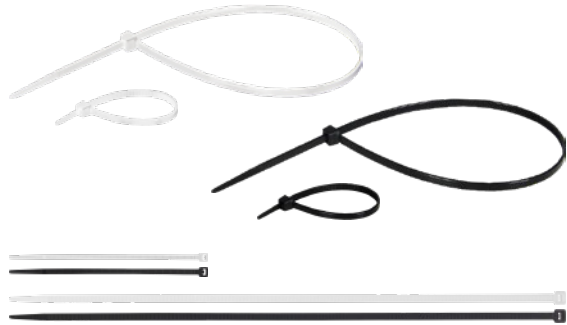


Material: Polyamide PA6.6
Self extinguishing: UL94-V2
Operating temperature: -40°C ÷ + 85°C
Installation temperature: -10°C

Good resistance to oils and greases, solvents, petroleum products.



Natural Color	Black Color	Width [mm]	Length [mm]	Max. Bundle Ø [mm]	Min. loop tensile [kg]	Packaging
Order N..	Order N.					
CTB2580	CTN2580	2,5	80	14,0	8	5.000/50.000
CTB2510	CTN2510	2,5	100	20,5	8	5.000/50.000
CTB2512	CTN2512	2,5	120	27,0	8	5.000/25.000
CTB2516	CTN2516	2,5	160	39,8	8	5.000/25.000
CTB2520	CTN2520	2,5	200	52,5	8	2.500/25.000
CTB3614	CTN3614	3,6	140	33,0	18	2.500/25.000
CTB3620	CTN3620	3,6	200	52,5	18	2.500/20.000
CTB3628	CTN3628	3,6	280	78	18	2.500/10.000
CTB3637	CTN3637	3,6	370	106,0	18	2.000/10.000
CTB4612	CTN4612	4,6	120	23,8	22	2.500/20.000
CTB4616	CTN4616	4,6	160	36,6	22	2.000/10.000
CTB4819	CTN4819	4,8	190	46,0	22	2.000/10.000
CTB4820	CTN4820	4,8	200	49,5	22	2.000/10.000
CTB4825	CTN4825	4,8	250	65,0	22	1.500/10.500
CTB4830	CTN4830	4,8	300	81,0	22	1.500/10.500
CTB4836	CTN4836	4,6	360	100	22	1.000/5.000
CTB4839	CTN4839	4,8	390	110,0	22	1.000/5.000
CTB4843	CTN4843	4,8	430	122,5	22	1.000/5.000
CTB7615	CTN7615	7,6	150	35,0	55	1.000/5.000
CTB7620	CTN7620	7,6	200	50,9	55	1.000/5.000
CTB7630	CTN7630	7,6	300	82,8	55	1.000/5.000
CTB7637	CTN7637	7,6	370	103,5	55	500/5.000
CTB7645	CTN7645	7,6	450	130,5	55	100/2.500
CTB7675	CTN7675	7,6	750	226	55	100/1.000
CTB9045	CTN9045	9,0	450	130,5	80	100/2.500
CTB9055	CTN9055	9,0	550	163,5	80	100/1.000
CTB9071	CTN9071	9,0	710	213,3	80	100/1.000
CTB9078	CTN9078	9,0	780	235,5	80	100/1.000
CTB9081	CTN9081	9,0	810	245,0	80	100/1.000
CTB9010	CTN9010	9,0	1020	312,0	80	100/500
CTB9012	CTN9012	9,0	1220	340	80	100/500
CTB9015	CTN9015	9,0	1530	474,5	80	100/500

POLYAMIDE PA6.6 CABLE TIES IN VARIOUS COLOURS

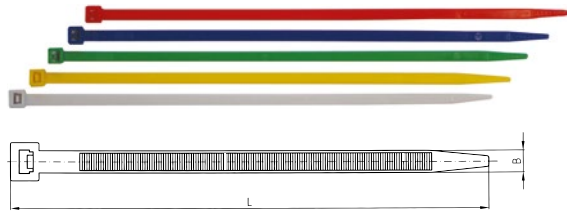

Material: Polyamide 6.6, various colors, halogen-free
Continuous service temperature: -40°C to + 85°C

Length mm	Width mm	Colour	Order N.	Max. Bundle Ø	max. tensile strength Newton	Packing
100	2,5	red	ICC61602	24	100	100
		blue	ICC61604			100
		green	ICC61606			100
		yellow	ICC61608			100
		grey	ICC61610			100
		black	ICC61151			100
140	3,5	natur	ICC61051	36	190	100
		red	ICC61612			100
		blue	ICC61614			100
		green	ICC61616			100
		yellow	ICC61618			100
		grey	ICC61620			100
200	4,5	black	ICC61159	51	270	100
		natur	ICC61059			100
		red	ICC61622			100
		blue	ICC61624			100
		green	ICC61626			100
		yellow	ICC61628			100
280	4,5	grey	ICC61630	76	270	100
		black	ICC61175			100
		natur	ICC61075			100
		red	ICC61632			100
		blue	ICC61634			100
		green	ICC61636			100
		yellow	ICC61638			100
		grey	ICC61640			100
		black	ICC61180			100
		natur	ICC61080			100

POLYAMIDE PA6.6 CABLE TIES FOR EXTERNAL USE UV RESISTANT



Material: Polyamide PA6.6. UV resistant
Self extinguish: UL94V-2
Operating temperature: -40°C ÷ +85°C
Installation temperature: -10°C

Weather resistance cable ties for outdoor use, high UV resistance.



Order N.	Width [mm]	Length [mm]	Max. Bundle Ø [mm]	Min. loop tensile [kg]	Packaging
CTN9018	9,0	180	40,0	40	5.000
CTN9026	9,0	265	62,0	55	2.500
CTN9036	9,0	360	93,0	55	2.500

AISI 304 STAINLESS STEEL CABLE TIES




Material: AISI 304 stainless steel
Operating temperature: -80°C ÷ +500°C

Good resistance to UV lights, oils, grease, solvents, petroleum products. Non-flammable.



Order N.	Width [mm]	Length [mm]	Max. Bundle Ø [mm]	Min. loop tensile [kg]	Packaging
CTS4615	4,6	150	46,0	90	100/5.000
CTS4620	4,6	200	61,9	90	100/5.000
CTS4629	4,6	290	90,6	90	100/2.500
CTS4636	4,6	360	112,8	90	100/2.500
CTS4652	4,6	520	163,8	90	100/2.000
CTS4668	4,6	680	214,8	90	100/1.000
CTS7920	7,9	200	61,9	150	100/2.500
CTS7929	7,9	290	90,6	150	100/2.000
CTS7936	7,9	360	112,8	150	100/2.000
CTS7952	7,9	520	163,8	150	100/1.000
CTS7968	7,9	680	214,8	150	100/1.000
CTS7984	7,9	840	265,7	150	100/1.000

POLYAMIDE PA6.6 RELEASABLE CABLE TIES

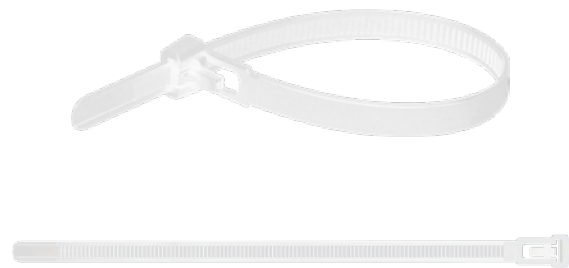


Material: Polyamide PA6.6
Self extinguish: UL94V-2
Operating temperature: -40°C ÷ +85°C
Installation temperature: -10°C
With trigger type releasable button

Good resistance to oils and greases, solvents, petroleum products.



Order N.	Width [mm]	Length [mm]	Max. Bundle Ø [mm]	Min. loop tensile [kg]	Packaging
CTR7615	7,6	150	40,3	22	100/5.000
CTR7620	7,6	200	55,6	22	100/5.000
CTR7630	7,6	300	88,1	22	100/5.000


CABLE TIES WITH STEE TONGUE ACC. TO DIN EN 50146 : 2000

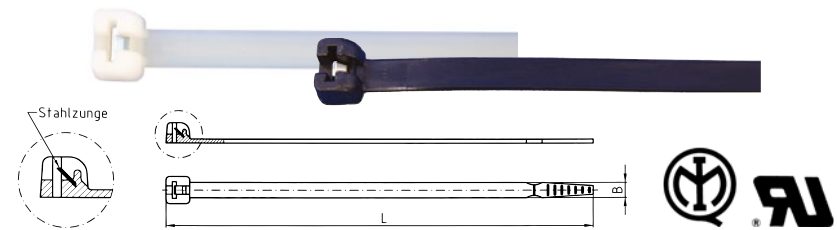

Material: Polyamide 6.6, steel tongue made of stainless steel, for high tensile strength, halogen-free
Continuous service temperature: -40°C to + 85°C



Length mm	Width mm	Order N.	Colour	Max. Bundle Ø	max. tensile strength Newton	Packing
100	2,5	ICC61251	natur	24	180	100
200		ICC61257		55		100
140	3,5	ICC61259		36	280	100
200		ICC61262		55		100
280		ICC61265		80		100
190	4,5	ICC61275		51	400	100
290		ICC61280		76		100
360		ICC61283		101		100
220	7,5	ICC61291		56	800	50
360		ICC61298		101		50
100	2,5	ICC61351	black	24	180	100
200		ICC61357		55		100
140	3,5	ICC61359		36	280	100
200		ICC61362		55		100
280		ICC61365		80		100
200	4,5	ICC61375		51	400	100
290		ICC61380		76		100
360		ICC61383		101		100
220	7,5	ICC61391		56	800	50
360		ICC61398		101		50

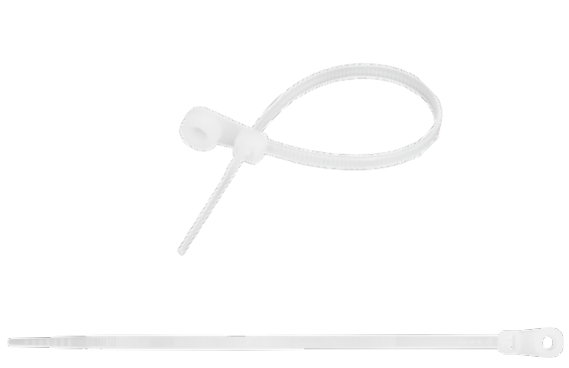


Material: Polyamide PA6.6
Self extinguishing: UL94-V2
Operating temperature: -40°C ÷ + 85°C
Installation temperature: -10°C
With mount head

Good resistance to oils and greases, solvents, petroleum products.



Order N.	Width [mm]	Length [mm]	Max. Bundle Ø [mm]	Min. loop tensile [kg]	Ø Fixing hole [mm]	Packaging
CTH2511*	2,5	110	19,0	8	2,5	100/25.000
CTH4820	4,8	200	49,5	22	5	100/10.000
CTH7630	7,6	305	78,7	55	6	100/6.000

* UL Certification not available

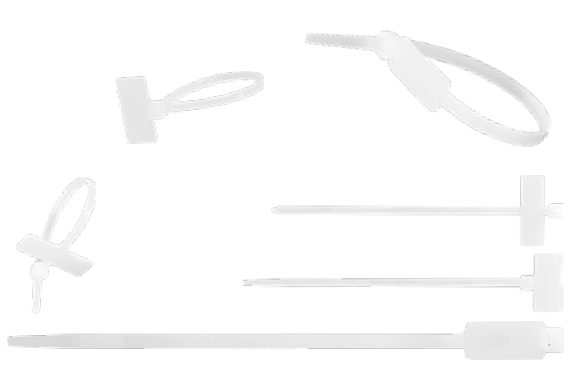


Material: Polyamide PA6.6
Self extinguish: UL94V-2
Operating temperature: -40°C ÷ +85°C
Installation temperature: -10°C
With marking plate


Good resistance to oils and greases, solvents, petroleum products.



Ref.	Type	Width [mm]	Length [mm]	Max. Bundle Ø [mm]	Min. loop tensile [kg]	Packaging
CTT2510	A	2,5	100	22,0	8	1.000/25.000
CTT2511*	C	2,5	110	22,6	8	1.000/25.000
CTT2520*	A	2,5	200	53,9	8	1.000/20.000
CTT1948*	B	4,8	190	50,9	22	1.000/10.000
CTT2748*	B	4,8	270	74,8	22	1.000/5.000

* UL Certification not available

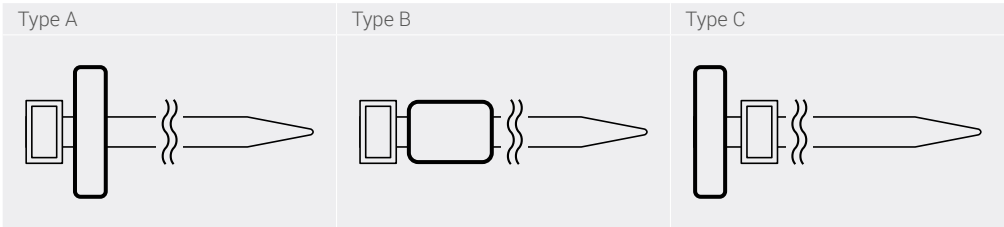

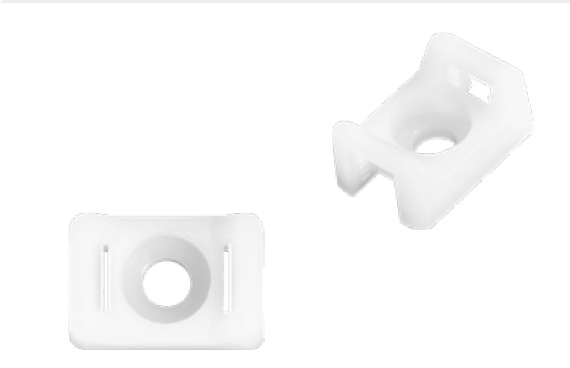

Material: Polyamide PA6.6
Self extinguish: UL94V-2
Operating temperature: -40°C ÷ +85°C
Installation temperature: -10°C

Fixing support with screw for cable ties



Order N.	Width [mm]	Length [mm]	Height [mm]	Fixing hole Ø [mm]	Max width cable ties [mm]	Packaging
CTNS1595	15	9,5	6,8	3,3	4,8	1.000/20.000
CTNS2216	22,0	16	9,6	5,2	7,6	1.000/10.000




Material: Polyamide PA6.6
Self extinguish: UL94V-2
Operating temperature: -40°C ÷ +85°C
Installation temperature: -10°C

Adhesive and fixing with screw support for cable ties



Natural Color	Black Color	Width	Length	For cable ties max. length [mm]		Packaging
Order N.	Order N.	[mm]	[mm]			
CTB1919	CTN1919	19,0	19	3,6	Adhesive	1.000/20.000
CTB2828	CTN2828	28,0	28	4,8	Adhesive	1.000/5.000
CTBS2828*	CTNS2828*	28,0	28	4,8	-	1.000/5.000

* UL Certification not available

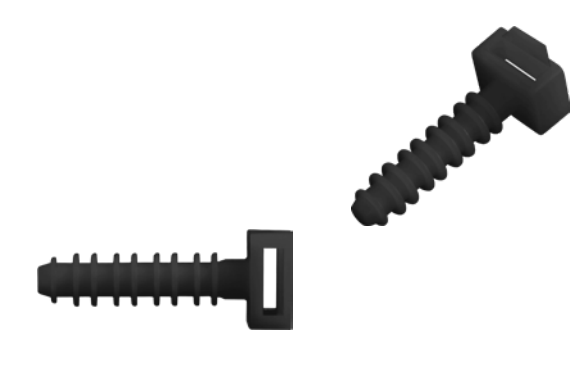

Material: Polyamide PA6.6
Self extinguish: UL94V-2
Operating temperature: -40°C ÷ +85°C
Installation temperature: -10°C



Order N.	Diameter [mm]	Length [mm]	For cable ties max. length [mm]	Packaging
CTN0908	8,1	38,1	7,6	1.000/5.000